

Flow Diversion Banks Part 3: Grass slopes

DRAINAGE CONTROL TECHNIQUE

Low Gradient	✓	Velocity Control		Short Term	✓
Steep Gradient		Channel Lining		Medium-Long Term	✓
Outlet Control		Soil Treatment		Permanent	[1]

[1] Flow diversion banks are not commonly used as permanent drainage structures.

Symbol → DB →



Photo supplied by Catchments & Creeks Pty Ltd

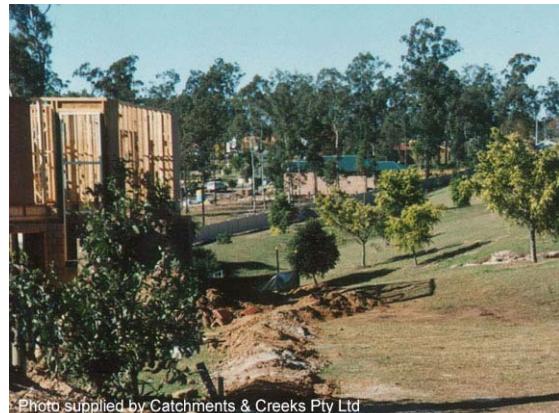


Photo supplied by Catchments & Creeks Pty Ltd

Photo 10 – Turf-lined flow diversion bank with grass-lined outlet chutes at regular intervals along the embankment

Photo 11 – Flow diversion bank up-slope of a building site – the bank also acts as a topsoil stockpile

Key Principles

1. Key design parameters are the effective flow capacity of the structure, and the scour resistance of the embankment material.
2. The critical operational issue is usually preventing structural damage to the embankment as a result of high velocity flows or construction traffic.
3. Flow diversion banks are often favoured over *Catch Drains* in areas containing dispersive subsoil because their construction does not require exposure of the subsoils.

Design Information

The material contained within this fact sheet has been supplied for use by persons experienced in hydraulic design.

Recommended allowable flow velocities for open earth surfaces are provided in Tables 19 & 20. The maximum flow velocity (i.e. the velocity most likely to cause erosion of the earth surface) is most likely to occur at the toe of the embankment where flow depth (y) is a maximum. In wide, shallow drains, such as typically occur adjacent flow diversion banks, the local flow velocity is dependent on the local flow depth rather than the hydraulic radius (R).

Table 21 presented the expected maximum flow velocity for various maximum flow depths and longitudinal channel gradients.

Tables 22 to 29 provide the expected flow capacity for flow diversion bank operating a various maximum flow depths on an open earth surface. These tables are based on an embankment side slope of 2:1 (H:V), and a Manning's roughness determined from Equation 1, but limited to a maximum value of, n = 0.2 and a minimum value of, n = 0.03.

Note; flow capacity is presented in units of [L/s] in Tables 22 to 25, and units of [m^3/s] in Tables 26 to 29.

Table 19 – Allowable flow velocity (m/s) for grass-lined drains^[1]

Percentage grass cover	Gradient (S) along drain (%)									
	1	2	3	4	5	6	8	10	15	20
70% ^[2]	2.0	1.8	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3
100% ^[3]	2.0	2.0	2.0	2.0	2.0	2.0	2.0	1.9	1.8	1.7
Poor soils ^[4]	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.0	0.9

- [1] Maximum allowable flow velocity limited to 2.0m/s for temporary catch drains due to high risk of poor grass-root development due to the expected short plant establishment time (even when turf is used).
- [2] 70% cover would be typical for most grasses established by seed, but only when there is sufficient plant establishment time prior to commissioning the drain (however, this is not typical on most construction sites).
- [3] 100% cover is typical for most newly established, turf-lined catch drains.
- [4] ‘Poor soils’ refers to the soil’s high erosion potential, such as dispersive clays (Emerson Class 1 and 2) such as sodic, yellow and red soils. Unstable, dispersible clayey sands and sandy clays, such as yellow and grey massive earths formed on sandstones and some granites. Highly erodible soils may include: lithosols, alluvials, podzols, siliceous sands, soloths, solodized solonetz, grey podzolics, some black earths, fine surface texture-contrast soils, and Soil Groups ML and CL.

Table 20 – Manning’s roughness for grassed surfaces (50–150mm blade)^[1]

R (m)	Gradient (S) along drain (%)					
	1	2	3	4	5	10
0.10	0.120	0.085	0.072	0.065	0.060	0.049
0.15	0.068	0.055	0.050	0.047	0.044	0.038
0.20	0.053	0.046	0.042	0.040	0.038	0.034
0.25	0.046	0.040	0.038	0.036	0.035	0.031
0.30	0.042	0.037	0.035	0.034	0.032	0.030
0.40	0.037	0.034	0.032	0.031	0.030	0.030
0.50	0.034	0.031	0.030	0.030	0.030	0.030

- [1] Manning’s n values can be approximated by Equation 2 (units of R [m] and S [m/m]). Note; minimum recommended Manning’s roughness, n = 0.030. Caution use of Equation 2 for low values of hydraulic radius (negative values can occur).

$$\text{Class D roughness: } n = \frac{R^{1/6}}{51.24 + 20.77 \log_{10} (R^{1.4} \cdot S^{0.4})} \quad (\text{Eqn 2})$$

Table 21 – Maximum flow velocity (toe of embankment) on earth surface (m/s)^[1]

Flow depth	Gradient (S) along drain (%)									
	0.5	1	2	3	4	5	6	8	10	15
0.05	0.05	0.07	0.10	0.12	0.14	0.15	0.18	0.27	0.36	0.57
0.10	0.08	0.18	0.36	0.52	0.67	0.80	0.93	1.17	1.39	1.88
0.15	0.22	0.41	0.72	0.98	1.21	1.43	1.63	1.99	2.32	3.07
0.20	0.37	0.64	1.06	1.41	1.73	2.01	2.27	2.76		
0.25	0.52	0.86	1.39	1.83	2.21	2.56	2.89			
0.30	0.66	1.06	1.70	2.22	2.68	3.09				
0.35	0.79	1.26	2.00	2.60	3.12					
0.50	1.17	1.83	2.84	3.64						

- [1] Maximum flow velocity refers to the maximum local flow velocity, which would occur adjacent the toe of the flow diversion bank at the point of maximum flow depth. The velocity has been determined using Manning’s equation based on a hydraulic radius (R) equal to the local flow depth (y), and Manning’s roughness determined from Equation 2, but limited to a maximum value of, n = 0.2 and a minimum value of, n = 0.03.

Hydraulic design of flow diversion banks:

- Step 1** Determine the required design discharge based on the effective catchment area of the flow diversion bank.
- Step 2** Determine the cross-sectional profile and surface condition. This fact sheet assumes the flow surface primarily consists of a grassed (50-150mm) surface.
- Step 3** Determine the allowable flow velocity for the surface material from Tables 4 and 19. Note; this is based on the surface of least scour resistance, whether the embankment or the adjacent grassed slope.
- Step 4** If the longitudinal gradient (S) of the drainage channel formed by the bank is known (i.e. set by site conditions), then determine the maximum allowable flow depth (y) from Table 21 given the allowable flow velocity determined in Step 3.

The maximum allowable flow depth (y) can also be determined directly from:

$$y = \frac{(n \cdot V)^{3/2}}{S^{3/4}} \quad (S \text{ has units of m/m})$$

If the longitudinal gradient of the drainage channel is not set by site conditions, then nominate a gradient from Table 21 based on a desirable maximum flow depth.

The maximum allowable longitudinal drainage gradient (S) can also be determined directly from:

$$S = \frac{(n \cdot V)^2}{y^{4/3}} \quad (S \text{ has units of m/m})$$

- Step 5** Determine the Manning's roughness (n) from Table 20, or Equation 2, as appropriate for the site conditions.
- Step 6** Determine the cross-sectional flow area (A) and hydraulic radius (R).
- Step 7** Determine the maximum allowable flow capacity (Q) of the flow diversion bank based on the values of n, A, R and S determined above.

Manning equation: $Q = (1/n) A R^{2/3} S^{1/2}$

Tables 22 to 29 provide flow capacities based on a simple triangular cross-sectional profile, an embankment side slope of 2:1 (H:V), and a Manning's roughness for a grassed surface determined from Equation 2, but limited to a maximum value of, n = 0.2 and a minimum value of, n = 0.03.

If the maximum flow capacity is less than the design discharge determined in Step 1, then it will be necessary to reduce the effective catchment area and design discharge of the flow diversion bank.

Alternatively, the scour resistance of the surface condition could be improved through appropriate erosion control measures, or the longitudinal gradient (S) of the drainage channel. Determine the required gradient (S) using Manning's equation.

$$S = \frac{(n \cdot V)^2}{y^{4/3}} \quad (S \text{ has units of m/m})$$

- Step 8** Determined the required freeboard given the embankment type – refer to Table 1 in fact sheet: *Flow Diversion Banks, Part 1 – General*.
- Step 9** Ensure suitable conditions exist (e.g. machinery access) to construct and maintain the embankment.
- Step 10** Specify the overall dimensions of the flow diversion bank, including freeboard.
- Step 11** Ensure the drainage embankment discharges to an appropriate, stable outlet.
- Step 12** Appropriately consider all likely safety issues, and modify the embankment and/or surrounding environment where required.

Design example:

Design a vegetated (grassed) flow diversion bank capable of carrying a design discharge of 1.5m³/s across a slope with a gradient of 3% (33:1) (note; this is the gradient of the land slope, not the drain slope).

- Step 1** The required design discharge is 1.5m³/s.
- Step 2** Assume a simple triangular cross-sectional profile with fully exposed earth surface.
- Step 3** From Table 4, adopt an allowable flow velocity, $V_{allow} = 2.0\text{m/s}$.
- Step 4** A vegetated embankment is assumed, thus the recommended minimum freeboard is 150mm. This means for an embankment height of 500mm, the maximum flow depth (y) is $500 - 150 = 350\text{mm}$. If flow depth is insufficient, then an embankment height greater than 500mm should be considered.
- Given $y = 350\text{mm}$, and $V_{allow} = 2.0\text{m/s}$, choose a longitudinal gradient (S) of 2% from Table 19.
- Step 5** Hydraulic capacity will be determined from Table 27, therefore Manning's roughness will be based on Equation 2.
- Step 6** There is no need to determine the cross-sectional flow area (A) and hydraulic radius (R) because the supplied design tables will be used. However, for demonstration purposes, given a maximum flow depth, $y = 0.35\text{m}$; embankment side slope, $a = 2$; and land slope, $b = 33$ (i.e. 3%); then:

$$A = 2.164\text{m}^2$$

$$R = 0.174\text{m}$$

$$n = 0.05$$

- Step 7** Given a maximum flow depth, $y = 0.35\text{m}$; land slope of 3%; and longitudinal drain slope, $S = 2\%$; from Table 27 the maximum flow capacity (Q) is:

$$Q_{max} = 1.917\text{m}^3/\text{s} > 1.5\text{m}^3/\text{s} \text{ OK}$$

Thus the flow diversion bank will have adequate flow capacity to carry the design discharge of 1.5m³/s.

- Step 8** From Table 1 the required minimum freeboard for a vegetated earth embankment is 150mm.
- Step 9** Ensure suitable conditions exist (e.g. machinery access) to construct and maintain the embankment.
- Step 10** Specify the overall dimensions of the flow diversion bank, including freeboard.

Embankment height of 500mm

Embankment side slopes of 2:1 (H:V)

Base width of embankment of 2500mm

Freeboard of 150mm

Longitudinal gradient of embankment of 2%

- Step 11** Ensure the drainage embankment discharges to an appropriate, stable outlet.
- Step 12** Appropriately consider all likely safety issues, and modify the embankment and/or surrounding environment where required.

Note, the allowable flow depth (y) is limited by the drain gradient and the allowable flow velocity.

Table 22 – Flow capacity (L/s) for flow diversion banks on grassed surface^[1]

Flow diversion bank on grassed surface			Flow depth, y = 0.10m							
Land slope %	Gradient (S) along drain (%)									
	0.10	0.50	1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0
1	10.9	24.4	34.6	48.9	59.8	69.1	77.3	90.1	137	183
2	5.56	12.4	17.6	24.9	30.5	35.2	39.3	45.4	69.5	92.5
3	3.77	8.44	11.9	16.9	20.7	23.9	26.7	30.5	46.8	62.4
4	2.88	6.44	9.10	12.9	15.8	18.2	20.4	23.1	35.5	47.3
5	2.34	5.24	7.41	10.5	12.8	14.8	16.6	18.6	28.7	38.3
6	1.98	4.44	6.27	8.87	10.9	12.5	14.0	15.6	24.1	32.3
7	1.73	3.86	5.47	7.73	9.47	10.9	12.2	13.5	20.9	27.9
8	1.54	3.44	4.86	6.87	8.42	9.72	10.9	11.9	18.4	24.7
9	1.39	3.10	4.39	6.20	7.60	8.77	9.81	10.7	16.5	22.2
10	1.27	2.83	4.01	5.67	6.94	8.02	8.96	9.82	15.0	20.1
12	1.09	2.43	3.44	4.87	5.96	6.88	7.69	8.43	12.7	17.1
15	0.91	2.03	2.87	4.06	4.98	5.74	6.42	7.04	10.4	14.0
20	0.73	1.63	2.30	3.26	3.99	4.60	5.15	5.64	8.01	10.9
25	0.62	1.38	1.96	2.77	3.39	3.92	4.38	4.80	6.56	9.00
33.3	0.51	1.14	1.61	2.28	2.79	3.23	3.61	3.95	5.07	7.04
50	0.40	0.89	1.26	1.78	2.18	2.52	2.82	3.09	3.56	4.94

[1] NOTE: Flow rate is presented in units of litres per second, not m³/s as used in Tables 26 to 29.

Table 23 – Flow capacity (L/s) for flow diversion banks on grassed surface^[1]

Flow diversion bank on grassed surface			Flow depth, y = 0.15m							
Land slope %	Gradient (S) along drain (%)									
	0.10	0.50	1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0
1	32.2	72.0	102	195	318	432	540	642	833	1012
2	16.4	36.7	51.9	98.4	161	219	274	326	423	514
3	11.1	24.9	35.2	66.3	109	148	185	220	286	348
4	8.49	19.0	26.8	50.3	82.6	113	141	167	218	264
5	6.91	15.4	21.8	40.6	66.9	91.2	114	136	177	215
6	5.85	13.1	18.5	34.2	56.4	76.9	96.3	115	149	181
7	5.10	11.4	16.1	29.6	48.9	66.7	83.6	99.6	130	158
8	4.53	10.1	14.3	26.1	43.2	59.1	74.0	88.2	115	140
9	4.09	9.14	12.9	23.4	38.8	53.1	66.6	79.4	103	126
10	3.74	8.36	11.8	21.3	35.3	48.4	60.6	72.3	94.2	115
12	3.21	7.17	10.1	18.0	30.0	41.2	51.7	61.7	80.4	97.9
15	2.68	5.99	8.47	14.7	24.7	33.9	42.7	51.0	66.6	81.1
20	2.15	4.80	6.79	11.4	19.3	26.6	33.6	40.2	52.6	64.2
25	1.83	4.08	5.77	9.34	16.0	22.2	28.0	33.6	44.1	53.9
33.3	1.50	3.36	4.76	7.23	12.6	17.6	22.4	26.9	35.5	43.4
50	1.17	2.63	3.71	5.25	9.02	12.8	16.4	19.9	26.4	32.5

[1] NOTE: Flow rate is presented in units of litres per second, not m³/s as used in Tables 26 to 29.

Note, the allowable flow depth (y) is limited by the drain gradient and the allowable flow velocity.

Table 24 – Flow capacity (L/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface				Flow depth, $y = 0.20m$						
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	69.4	155	355	731	1058	1355	1631	1891	2373	2817
2	35.3	79.0	180	371	537	688	829	961	1205	1431
3	24.0	53.6	122	251	363	466	561	650	816	969
4	18.3	40.9	92.2	191	276	354	427	495	622	738
5	14.9	33.3	74.7	154	224	288	347	402	505	599
6	12.6	28.2	62.9	130	189	243	293	340	427	507
7	11.0	24.5	54.5	113	165	211	255	295	371	441
8	9.76	21.8	48.2	100	146	187	226	262	329	391
9	8.81	19.7	43.3	90.3	131	169	203	236	297	353
10	8.05	18.0	39.4	82.2	120	154	185	215	271	322
12	6.91	15.4	33.4	70.1	102	131	158	184	231	275
15	5.77	12.9	27.5	57.9	84.6	109	131	153	192	228
20	4.62	10.3	21.4	45.6	66.8	86.1	104	121	152	181
25	3.93	8.79	17.7	38.1	56.0	72.3	87.5	102	128	153
33.3	3.24	7.24	13.9	30.5	45.1	58.4	70.7	82.4	104	124
50	2.53	5.66	9.90	22.5	33.6	43.7	53.2	62.1	78.8	94.2

[1] NOTE: Flow rate is presented in units of litres per second, not m³/s as used in Tables 26 to 29.

Table 25 – Flow capacity (L/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface				Flow depth, $y = 0.25m$						
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	126	464	938	1725	2398	3002	3559	4080	5042	5924
2	64.0	235	476	876	1218	1525	1809	2074	2563	3011
3	43.4	159	322	593	825	1033	1225	1404	1736	2040
4	33.1	121	245	451	628	787	933	1070	1322	1554
5	27.0	97.6	199	366	510	639	758	869	1074	1263
6	22.8	82.3	168	309	431	540	641	735	909	1068
7	19.9	71.4	146	269	375	470	557	639	790	929
8	17.7	63.1	129	239	332	417	494	567	702	825
9	16.0	56.7	116	215	299	375	446	511	632	744
10	14.6	51.6	106	196	273	342	406	466	577	678
12	12.5	43.8	90.1	167	233	293	348	399	494	581
15	10.5	36.0	74.5	139	194	243	289	331	410	483
20	8.38	28.2	58.7	110	154	193	229	264	326	384
25	7.13	23.4	49.1	92.3	129	163	193	222	276	325
33.3	5.87	18.4	39.4	74.5	105	132	157	181	224	264
50	4.59	13.2	29.1	55.9	79.0	100	119	137	171	202

[1] NOTE: Flow rate is presented in units of litres per second, not m³/s as used in Tables 26 to 29.

Note, the allowable flow depth (y) is limited by the drain gradient and the allowable flow velocity.

Table 26 – Flow capacity (m³/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface			Flow depth, y = 0.30m							
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	0.205	1.021	1.889	3.299	4.490	5.554	6.529	7.438	9.110	10.64
2	0.104	0.518	0.959	1.676	2.282	2.822	3.318	3.781	4.631	5.408
3	0.071	0.350	0.649	1.135	1.545	1.912	2.248	2.562	3.138	3.665
4	0.054	0.266	0.494	0.864	1.177	1.456	1.713	1.952	2.391	2.793
5	0.044	0.216	0.401	0.702	0.956	1.183	1.391	1.586	1.943	2.269
6	0.037	0.182	0.339	0.593	0.809	1.001	1.177	1.341	1.644	1.920
7	0.032	0.158	0.294	0.516	0.703	0.870	1.024	1.167	1.430	1.671
8	0.029	0.140	0.261	0.458	0.624	0.773	0.909	1.036	1.270	1.483
9	0.026	0.126	0.235	0.412	0.562	0.696	0.819	0.934	1.145	1.337
10	0.024	0.115	0.214	0.376	0.513	0.635	0.748	0.852	1.045	1.221
12	0.020	0.098	0.183	0.322	0.439	0.544	0.640	0.730	0.895	1.045
15	0.017	0.081	0.152	0.267	0.365	0.452	0.532	0.607	0.744	0.870
20	0.014	0.064	0.120	0.212	0.290	0.359	0.423	0.483	0.593	0.693
25	0.012	0.053	0.101	0.179	0.244	0.303	0.357	0.408	0.501	0.586
33.3	0.010	0.043	0.081	0.145	0.199	0.247	0.291	0.332	0.408	0.478
50	0.007	0.031	0.061	0.110	0.151	0.188	0.222	0.254	0.313	0.366

Table 27 – Flow capacity (m³/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface			Flow depth, y = 0.35m							
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	0.353	1.861	3.285	5.569	7.482	9.181	10.73	12.18	14.83	17.25
2	0.178	0.945	1.669	2.830	3.803	4.667	5.457	6.192	7.540	8.769
3	0.120	0.639	1.130	1.917	2.576	3.162	3.698	4.196	5.110	5.943
4	0.091	0.487	0.860	1.460	1.963	2.409	2.818	3.198	3.894	4.529
5	0.074	0.395	0.698	1.186	1.595	1.958	2.289	2.598	3.165	3.681
6	0.062	0.334	0.591	1.003	1.349	1.656	1.937	2.199	2.678	3.115
7	0.054	0.290	0.513	0.872	1.173	1.441	1.685	1.913	2.330	2.711
8	0.047	0.257	0.455	0.774	1.042	1.279	1.496	1.698	2.069	2.407
9	0.042	0.231	0.410	0.698	0.939	1.153	1.349	1.532	1.866	2.171
10	0.039	0.211	0.374	0.637	0.857	1.052	1.231	1.398	1.703	1.982
12	0.033	0.180	0.320	0.545	0.733	0.901	1.054	1.197	1.459	1.698
15	0.027	0.149	0.265	0.453	0.610	0.749	0.877	0.996	1.214	1.413
20	0.021	0.118	0.211	0.360	0.485	0.597	0.699	0.793	0.968	1.126
25	0.017	0.099	0.177	0.304	0.410	0.504	0.591	0.671	0.819	0.953
33.3	0.014	0.080	0.144	0.247	0.334	0.411	0.481	0.547	0.668	0.778
50	0.011	0.060	0.109	0.188	0.255	0.314	0.369	0.420	0.513	0.598

Note, the allowable flow depth (y) is limited by the drain gradient and the allowable flow velocity.

Table 28 – Flow capacity (m³/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface			Flow depth, y = 0.40m							
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	0.687	3.033	5.201	8.645	11.51	14.05	16.36	18.51	22.45	26.02
2	0.348	1.541	2.643	4.394	5.852	7.143	8.320	9.413	11.41	13.23
3	0.235	1.043	1.790	2.977	3.965	4.840	5.638	6.379	7.736	8.970
4	0.179	0.794	1.363	2.268	3.021	3.688	4.297	4.862	5.896	6.837
5	0.145	0.645	1.107	1.843	2.455	2.997	3.492	3.951	4.792	5.557
6	0.122	0.545	0.936	1.559	2.077	2.536	2.955	3.344	4.056	4.703
7	0.106	0.474	0.814	1.356	1.807	2.207	2.571	2.910	3.529	4.093
8	0.093	0.420	0.723	1.204	1.604	1.959	2.283	2.584	3.134	3.635
9	0.084	0.378	0.651	1.085	1.447	1.767	2.059	2.330	2.827	3.279
10	0.076	0.345	0.594	0.990	1.320	1.613	1.879	2.127	2.581	2.993
12	0.065	0.295	0.508	0.848	1.131	1.381	1.610	1.822	2.211	2.565
15	0.053	0.245	0.422	0.705	0.940	1.149	1.339	1.516	1.840	2.135
20	0.042	0.194	0.335	0.561	0.749	0.916	1.068	1.209	1.468	1.703
25	0.035	0.163	0.283	0.474	0.633	0.774	0.903	1.023	1.243	1.442
33.3	0.027	0.132	0.230	0.386	0.516	0.632	0.737	0.835	1.015	1.179
50	0.020	0.099	0.174	0.295	0.395	0.484	0.566	0.642	0.781	0.907

Table 29 – Flow capacity (m³/s) for flow diversion banks on grassed surface

Flow diversion bank on grassed surface			Flow depth, y = 0.50m							
Land slope %	Gradient (S) along drain (%)									
	0.1	0.5	1	2	3	4	5	6	8	10
1	1.768	6.568	10.88	17.64	23.22	28.13	32.60	36.73	44.29	51.14
2	0.897	3.337	5.531	8.968	11.81	14.30	16.58	18.68	22.52	26.01
3	0.607	2.260	3.747	6.077	8.001	9.695	11.24	12.66	15.27	17.63
4	0.462	1.722	2.855	4.632	6.098	7.390	8.565	9.653	11.64	13.44
5	0.374	1.398	2.319	3.764	4.956	6.006	6.961	7.846	9.461	10.93
6	0.316	1.183	1.962	3.185	4.194	5.083	5.892	6.641	8.008	9.249
7	0.275	1.028	1.707	2.771	3.650	4.424	5.128	5.780	6.970	8.050
8	0.243	0.913	1.515	2.461	3.241	3.929	4.554	5.133	6.191	7.150
9	0.219	0.823	1.366	2.219	2.923	3.543	4.108	4.630	5.585	6.450
10	0.200	0.750	1.247	2.025	2.668	3.235	3.750	4.228	5.099	5.890
12	0.170	0.642	1.067	1.735	2.286	2.772	3.213	3.623	4.370	5.048
15	0.141	0.533	0.887	1.443	1.902	2.307	2.675	3.016	3.639	4.204
20	0.111	0.424	0.706	1.150	1.517	1.840	2.134	2.407	2.905	3.356
25	0.093	0.358	0.597	0.973	1.284	1.558	1.807	2.039	2.461	2.844
33.3	0.075	0.290	0.486	0.794	1.048	1.273	1.478	1.667	2.013	2.328
50	0.055	0.221	0.371	0.609	0.806	0.979	1.137	1.284	1.552	1.796